

24 HEAD MULTIHEAD WEIGHER




APPLICATIONS

- Coffee / Tea
- Pet Foods
- Dry Goods
- Nutritional Products
- Pharmaceuticals
- Fresh Produce
- Bakery
- Confectionary
- Frozen Foods
- Snack Food
- Meats
- Hardware
- Household Chemicals

FEATURES

- Stainless steel construction
- IP65 for easier cleaning
- Modular control system for more stability and lower maintenance fees
- Production records may be checked at any time or download to PC
- Load cell or photo sensor checking to meet a variety of requirements
- Pre-set staggered dump function to stop blockages
- Quick release linear feeder pans and lift off buckets and chutes
- Adjustable open/close door profiles
- Angle adjustable discharge chute for various sized products
- Food contact parts are easily disassembled without tooling for easier cleaning

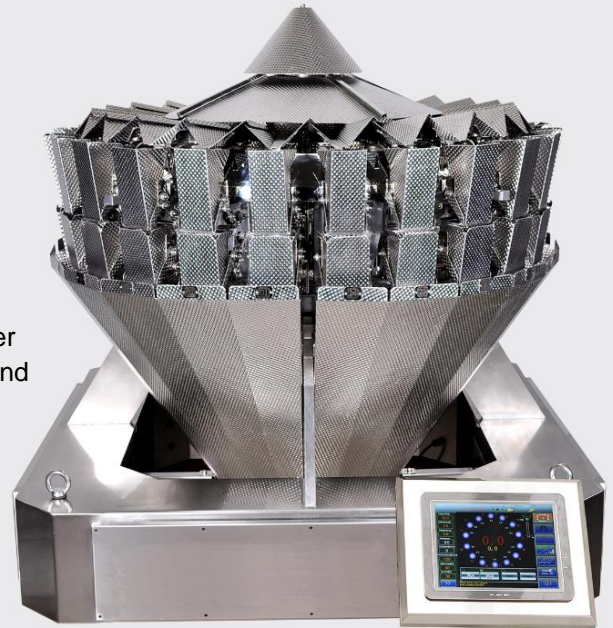

PRODUCT SAMPLES



SPECIFICATIONS

MODEL	1.6 OR 2.5 LITRE
Weighing Range	10-1000 grams
Speeds	Single 120 bags/min, twin 100*2 bags/min
Accuracy	± 0.1-1.5 grams
Power Supply	220V 50 / 60 HZ 4KW
Driving System	Step motor
Dimensions (L x W x H)	L1788*W1788*H1700 mm 70.4 x 70.4 x 66.9" in.


24 HEAD, 3-LEVEL MULTIHEAD WEIGHER

APPLICATIONS

- Nutritional Products
- Confectionary
- Dry Goods
- Meats
- Pet Foods
- Snack Food (chips, nuts)
- Fresh Produce
- Household Chemicals
- Pharmaceuticals
- Hardware
- Bakery
- Seafood
- Coffee / Tea
- Frozen Foods

FEATURES

- Mixing 2,3,4, or 6 similar or different products into the same packaging
- Single items run at higher speeds with precise accuracy
- Three weighing modes:
 - a) mono, b) quadrant control as one weight, c) individual quadrants with four different weights
- Scale can easily be set up to feed into multiple packaging solutions i.e. dual baggers, dual tray filling, etc.
- HMI with password-protected levels and recipe recall
- #304 stainless steel system and all contact parts are fully washdown
- Toolless removal of all pans, hoppers, weighing buckets, and chutes for easy cleaning
- USB port for data recording
- Self-diagnosis, stagger dump, and feedback counting all standard features

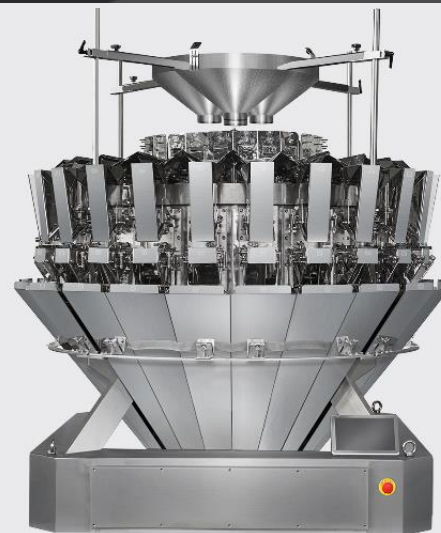

PRODUCT SAMPLES



SPECIFICATIONS

MODEL	0.5 LITRE	0.8 LITRE	1.6 OR 2.5 LITRE
Weighing Range	10-800 grams	10-900 grams	10-1000 grams
Speeds	4-6 FLAVOUR MIX 1 delivery chute: 50ppm SINGLE FLAVOUR MIX 1 delivery chute: 120ppm 2 delivery chutes: 240ppm	4-6 FLAVOUR MIX 1 delivery chute: 50ppm SINGLE FLAVOUR MIX 1 delivery chute: 120ppm 2 delivery chutes: 240ppm	4-6 FLAVOUR MIX 1 delivery chute: 45ppm SINGLE FLAVOUR MIX 1 delivery chute: 110ppm 2 delivery chutes: 200ppm
Accuracy	±0.1-1.0 grams	±0.1-1.0 grams	±1-1.5 grams
Power Supply	220V / 60Hz / 4kw	220V / 60Hz / 4kw	220V / 60Hz / 4.5kw
Driving System	Step motor		
Dimensions (L x W x H)	L1791*W1791*H1854 mm 70.5 x 70.5 x 73.0" in.	L1791*W1791*H1854 mm 70.5 x 70.5 x 73.0" in.	L2100*W2100*H2234 mm 82.7 x 82.7 x 88.0" in.



PRECISE. RELIABLE. AFFORDABLE.

226 Industrial Parkway N, Unit #3
 Aurora, Ontario L4G 4C3
 905.737.5400 | cam-systems.ca